



Инструменты WEB разработчика



ИЗ ИСТОРИИ DEVELOPER TOOLS

FireBug







FireBug



- Позволяет следить за CSS, HTML и JavaScript на любой веб-странице, что стало огромным шагом вперед когда он вышел в 2005 году
- Firebug стал первым инструментом, позволяющим программистам проверять, редактировать и отлаживать код прямо в браузере Firefox.
- Разработчик Joe Hewitt

FireBug

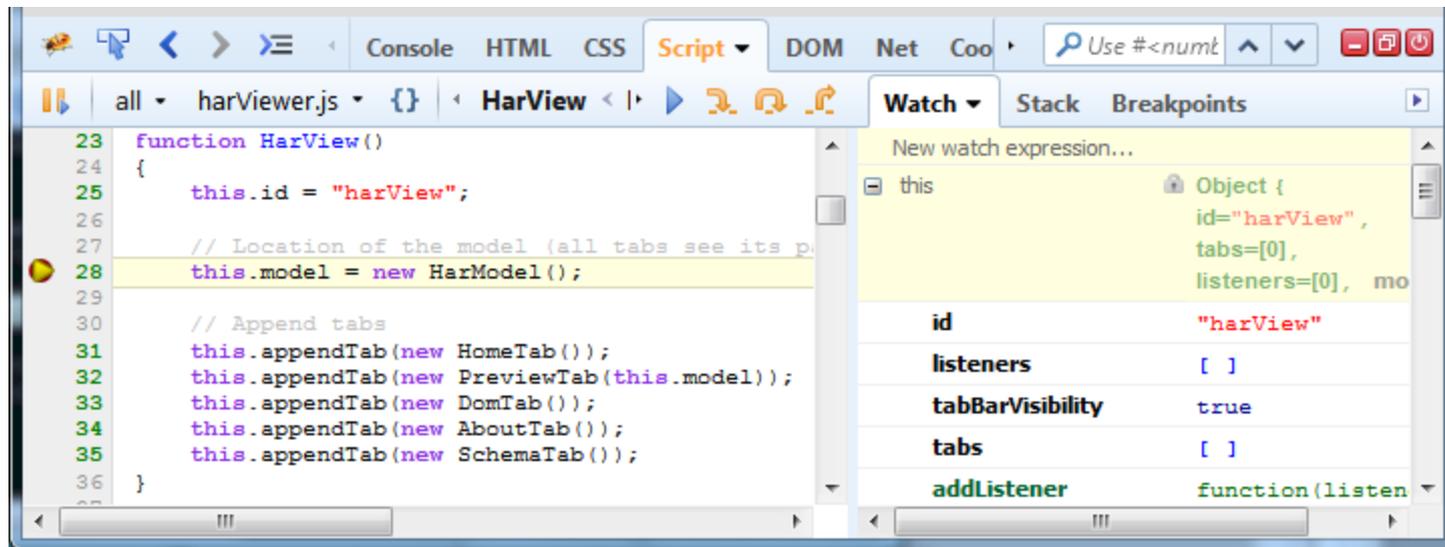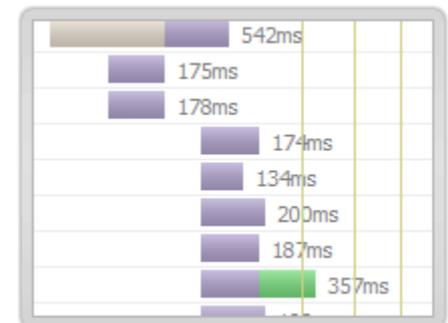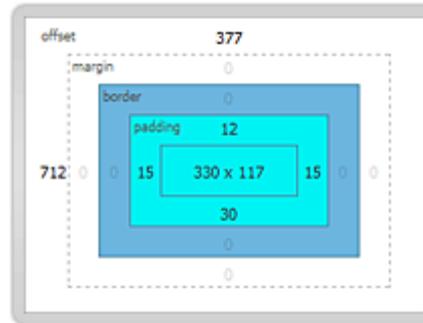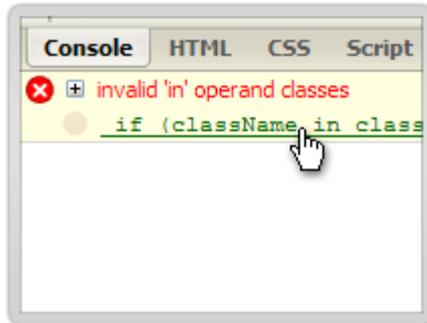

Вехи проекта FireBug



- **Jan 2006, Firebug 0.2** Joe releases the single tab [console](#) with AJAX logging.
- **May 2006, Firebug 0.4** There is a new top-level tab for JavaScript [debugging](#).
- **Dec 2006** Firebug is open-sourced.
- **Jan 2007, Firebug 1.0** The start of Web 2.0!
- **Aug 2008, Firebug 1.2** First FWG (Firebug Working Group) release.
- **Oct 2009, HTTP Archive (HAR)** [One archive](#) for web performance and beyond.
- **Feb 2010, Firebug Lite** for Google Chrome [released](#) (bookmarklet).
- **Apr 2010**, Dynamic and Graphical Web Page Breakpoints invented ([pdf](#)).
- **2011** Boom of Firebug [extensions](#).
- **June 2014, Firebug 2.0** Fresh new UI compatible with Firefox Australis.
- **June 2016, [Unifying](#)** Firebug & Firefox DevTools.
- **Oct 2017, Goodbye Firebug!**

FireBug



- Firebug закончил свою историю в браузере Firefox с выпуском Firefox Quantum (версия 57)
- Все возможности Firebug теперь присутствуют в текущих инструментах разработчика Firefox.



Chrome DevTools

F12

Developer Tools



The screenshot displays the Chrome Developer Tools interface. The top navigation bar includes tabs for Elements, Console, Sources, Network, Performance, Memory, Application, Security, Audits, and Augury. The main area is split into two panes: the DOM tree on the left and the Styles pane on the right.

The DOM tree shows the following structure:

```
<!DOCTYPE html>
<html>
  #shadow-root (open)
  <head>...</head>
  <body style>
    <div style="max-width: 1403px; margin: 0 auto">
      <!-- Header -->
      <header id="layout-header">...</header>
      <!-- Sidebar -->
      <section id="layout-sidebar">...</section>
      <!-- Content -->
      <section id="layout-content">
        <div id="homePosts" class="post-list home-posts" style="position: relative; height: 2161.19px;">
          ::before
          <div class="home-post" style="position: absolute; left: 0px; top: 0px;">
            <article>
              <header class="post-title">
                <h1>...</h1>
              </header>
              ...
            </div>
            <div class="post-content"> == $0
              "
              Определение типизации, основные функции типов
              данных, классификация, примеры.
              "
            </div>
            <footer>
              <span class="published">...</span>
            </div>
          </div>
        </div>
      </section>
    </div>
  </body>
</html>
```

The Styles pane shows the following styles for the selected element:

```
element.style {
}

.post-single article ded89c1e422f797...1496906597:120
.post-content, .post-list article .post-content {
  padding: 0 10% 5%;
}

* {
  -webkit-box-sizing: border-box;
  -moz-box-sizing: border-box;
  box-sizing: border-box;
}

div {
  display: block;
}

Inherited from body
body {
  background-color: #f0f0f0;
  color: rgba(51, 51, 51, 0.7);
}

body {
  font-family: 'PT Sans', sans-serif;
  font-size: 16px;
  line-height: 1.6;
  color: #586667;
  background-color: #ffffff;
}
```

The breadcrumb at the bottom of the DOM tree reads: html > body > div > #layout-content > #homePosts > div > article > div.post-content.

Developer Tools



Developer Tools - http://tyapk.ru/

Elements Console Sources Network Performance Memory Application Security Audits Augury >> 1

top Filter Default levels

```
> let trueNumber = 777 + Number('99');
< undefined
> trueNumber
< 876
> $('.home-post')
✖ Uncaught SyntaxError: Invalid or unexpected token VM1571:1
> $('.home-post')
< (10) [div.home-post, div.home-post, div.home-post, div.home-post, div.home-post, div.home-post, div.home-post, div.home-post,
  ▶ ".home-post"]
> 3+5
< 8
>
```

Developer Tools



Developer Tools - http://tyapk.ru/

Elements Console Sources Network Performance Memory Application Security Audits Augury >> 1

Sources >> 648ab84c1f3e41a...0c9-1503648413 x >>

- top
 - tyapk.ru
 - combine
 - 55f3b7ab11bf9be03
 - 65261e8fb8513bf60
 - 648ab84c1f3e41a79**
 - 6afcad772e7191398
 - ded89c1e422f79779
 - themes/responsiv-clear
 - (index)
 - Augury
 - fonts.googleapis.com
 - mc.yandex.ru
 - www.google-analytics.com
 - yastatic.net

```
1 @import url('https://fonts.googleapis.com/css
2 .home-posts:before,.home-posts:after{content:
3 .home-posts:after{clear:both}
4 .home-posts .home-post{margin:0 2%;width:46%;
5 @media (max-width:767px){.home-posts .home-po
6 }
7 .ss-search-form{position:relative}
8 .ss-search-form__input{font-size:12px}
9 .ss-search-form__submit{padding:5px 15px}
10 .ss-search-form input{padding:5px}
11 .ss-search-form__results{display:none;positio
12 .ss-search-form__results--visible{display:blo
```

Watch

Call Stack

Not paused

Scope

Not paused

Breakpoints

No breakpoints

XHR Breakpoints


DOM Breakpoints

Global Listeners


Event Listener Breakpoints

{ } Line 1, Column 1

Developer Tools

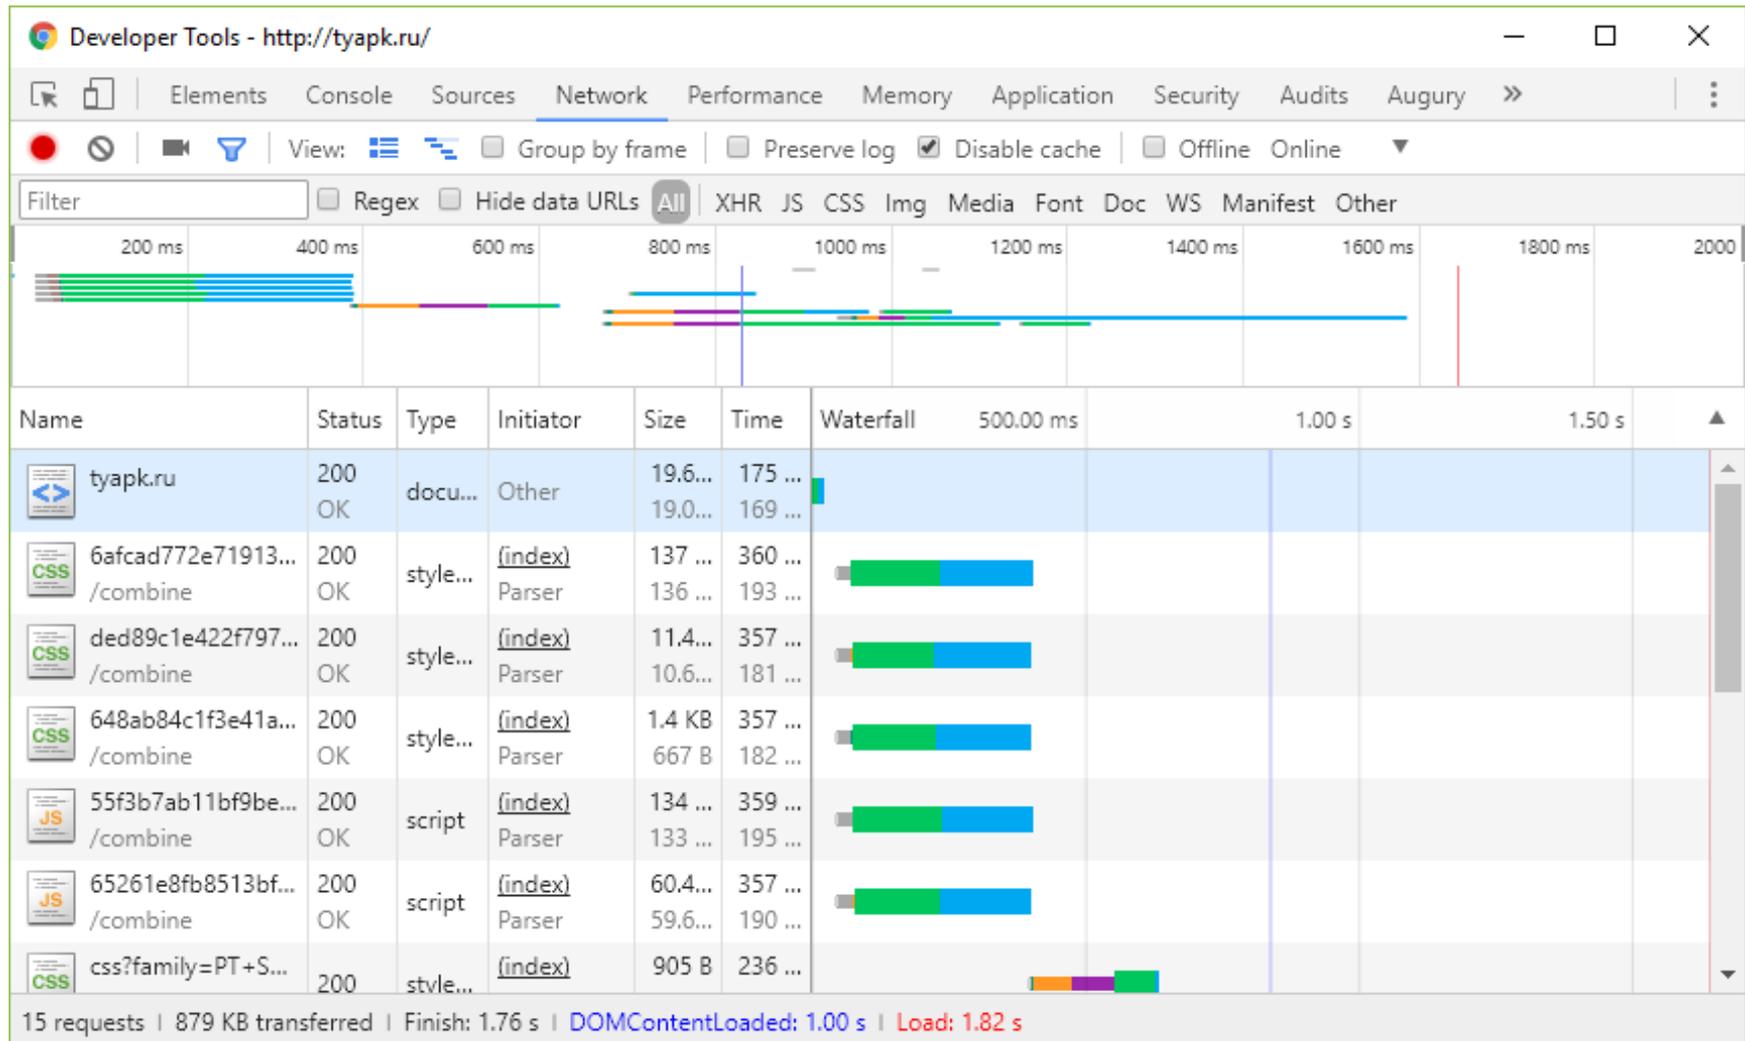

Developer Tools

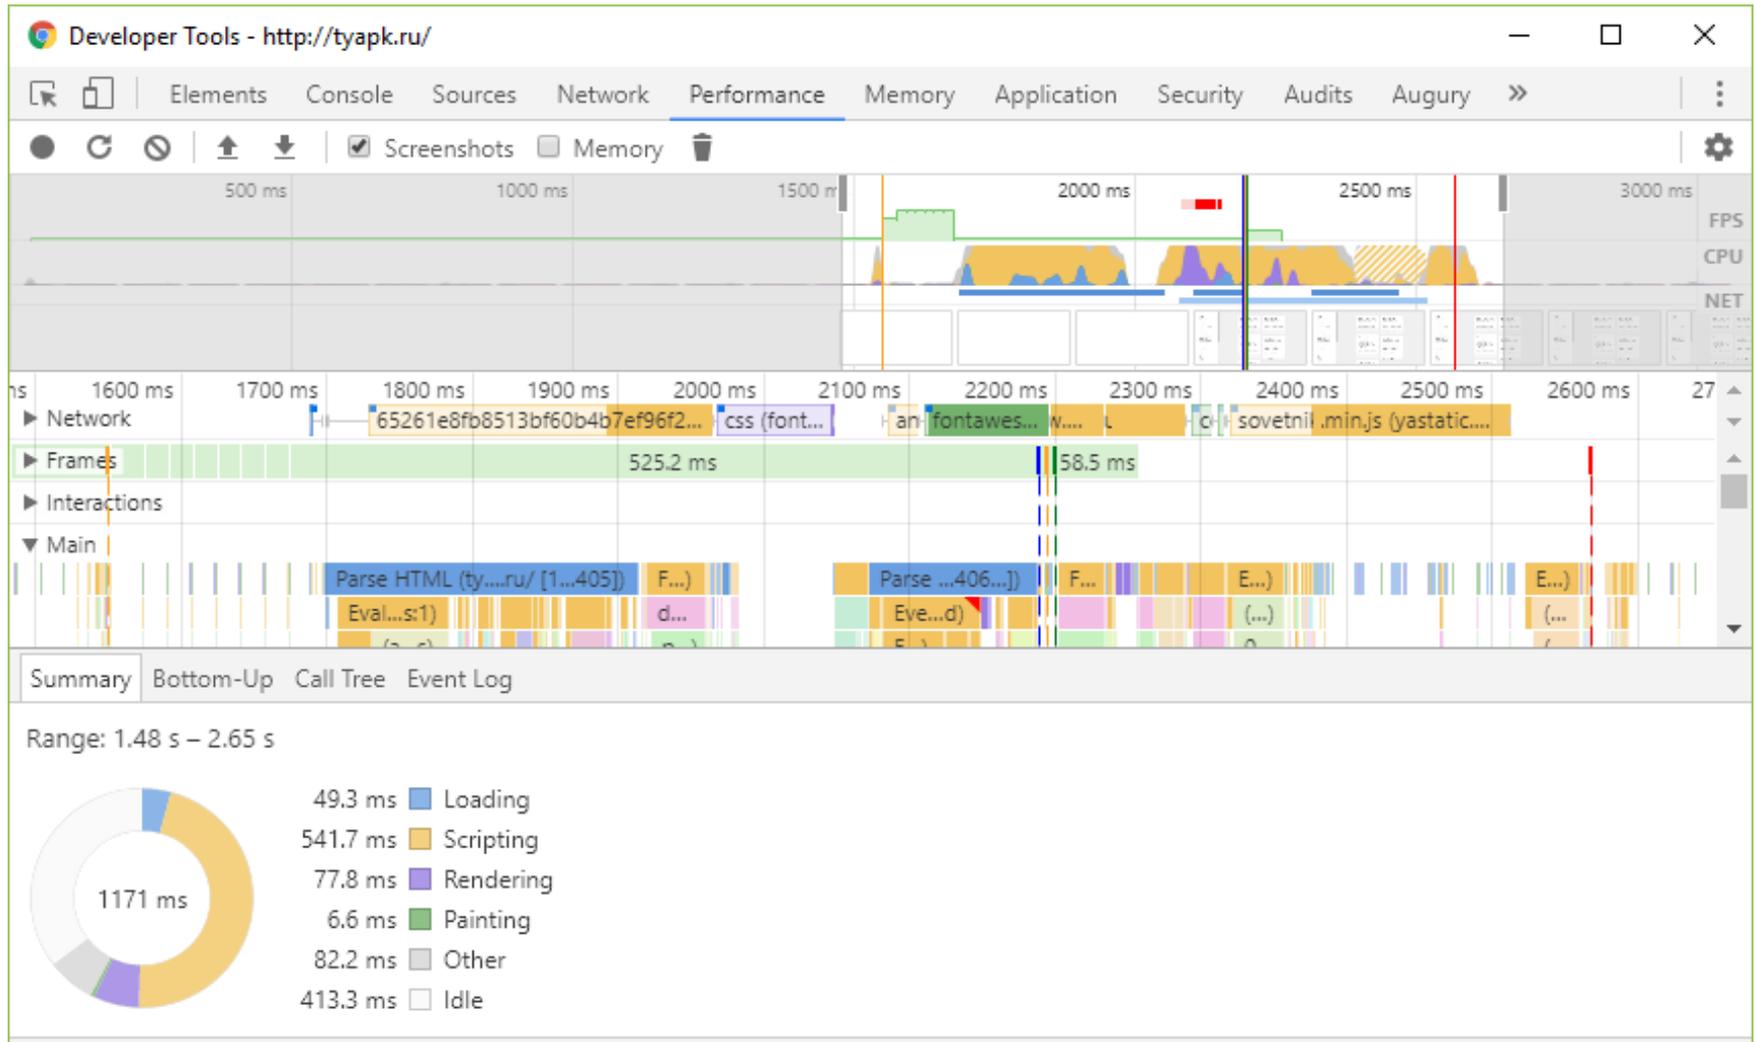

Developer Tools



The screenshot shows the Chrome Developer Tools interface with the Audits panel open. The browser address bar shows 'http://tyapk.ru/'. The Audits panel displays four categories: Progressive Web App (36), Performance (66), Accessibility (94), and Best Practices (77). The Progressive Web App section is expanded, showing a score of 36 and a list of 7 failed audits. Each audit is accompanied by a red 'X' icon and a list of failures.

Audit Category	Score
Progressive Web App	36
Performance	66
Accessibility	94
Best Practices	77

Audit Category	Score
Progressive Web App	36

These audits validate the aspects of a Progressive Web App, as specified by the baseline [PWA Checklist](#).

7 failed audits

- ▶ Does not register a Service Worker ✘
Failures: No manifest was fetched, Site does not register a Service Worker, Manifest start_url is not cached by a Service Worker.
- ▶ Does not respond with a 200 when offline ✘
- ▶ Does not use HTTPS: 7 insecure requests found ✘
- ▶ Does not redirect HTTP traffic to HTTPS ✘
- ▶ User will not be prompted to Install the Web App ✘
- ▶ Is not configured for a custom splash screen ✘
Failures: No manifest was fetched.
- ▶ Address bar does not match brand colors ✘
Failures: No manifest was fetched, No `

Поиск по селектору



Поле поиска в панели элементов ищет не только текст но и совпадающие селекторы.





РАБОТА СО СТИЛЯМИ

Styles Tab



Возможности:

- просматривать применённые CSS-правила
- изменять свойства через атрибут style
- добавлять классы и псевдоклассы
- создавать селекторы

```
Styles Computed Event Listeners DOM Breakpoints Properties
Filter :hov .cls +
Add new class
 segment-list  segment-title
element.style {
  color: red;
}
h1.segment-list.segment-title { inspector-stylesheet:1
}
.post-single article header ded89c1e422f797...1496906597:121
h1, .post-list article header h1, .post-single article
.post-image h1, .post-list article .post-image h1 {
  font-size: 3.5rem;
  line-height: 1.2;
  margin: 0 0 1.2em;
}
h1, h2, h3, h4, h5, h6, ded89c1e422f797...d-1496906597:1
.h1, .h2, .h3, .h4, .h5, .h6 {
  font-family: 'PT Serif', serif;
  font-weight: 300;
}
h1, .h1 { 6afcad772e71913...1496906597:179
  font-size: 41px;
}
h1, .h1, h2, .h2, h3, .h3 { 6afcad772e71913...1496906597:175
margin-top: 25px;
margin-bottom: 12.5px;
}
```

Выбор цвета



Styles Computed Event Listeners DOM Breakpoints Properties

Filter

```
element.style {  
}  
#gb#gb a.gb_P, #gb#gb span.gb_P {  
   color: #000;  
}  
#gb#gb a.gb_P, #gb#gb span.gb_P {  
  text-decoration: none;  
}
```

Open color picker. Shift + Click to change color format.

«Пипетка»

```
element.style {  
  color: red;  
}  
h1.segment {  
} or-style:1  
}.post-si...1496906597:121  
h1, .pos...gle article  
.post-im...ge h1 {  
  font-s...  
  line-h...  
  margin...  
}  
h1, h2, ...d-1496906597:1  
.h1, .h2...  
  font-t...  
  font-v...  
}  
h1, .h1...1496906597:179  
  font s...  
}  
h1, .h1, ...1496906597:175  
  margin...  
  margin bottom: 12.5px;  
}
```


A screenshot of a web browser's developer tools interface. The 'Styles' panel is open, showing a CSS rule for 'color: red;'. A color picker dialog is overlaid on the code, displaying a red color swatch, a color spectrum, and a hex code input field containing '#ff0000'. The dialog also shows a grid of color swatches at the bottom.

Computed Tab



Возможность
просмотреть:

- свойства узлов HTML документа
- каскад применённых правил
- отрисованные шрифты

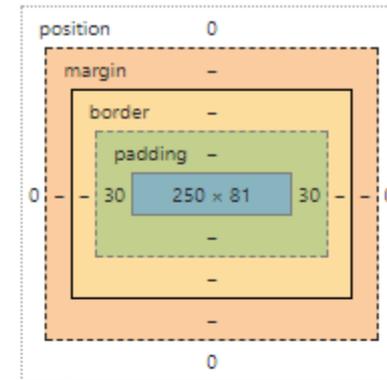

Filter	<input type="checkbox"/> Show all
▶ box-sizing	border-box
▶ color	■ rgba(51, 51, 51, 0.7)
▶ display	block
▼ font-family	"PT Sans", sans-serif
	'PT Sans', sans-serif body 6afcad772e71913...1496906597:158
	sans-serif html 6afcad772e71913...-1496906597:97
▶ font-size	16px
height	81px
▼ line-height	25.6px
	1.6 body 6afcad772e71913...1496906597:158
▼ min-height	1px
	1px .col-xs-1, .col-sm-1, .col-md-1, .col-lg-1, .col... 6afcad772e71913...1496906597:259
▶ padding-left	30px
▶ padding-right	30px
▶ position	relative
▶ text-size-adjust	100%
▶ width	310px
▶ -webkit-tap-highlight-color	<input type="checkbox"/> rgba(0, 0, 0, 0)

Toggle Device Toolbar

A screenshot of a web browser interface on a Nexus 5X device. The browser's address bar shows 'Nexus 5X', a window size of '732 x 412', '100%' zoom, and 'Online' status. The page content is in Russian and features a large heading 'Руководство по Markdown'. Below the heading, there is a vertical line followed by the text '150 руководств есть, а своего не хватает.' and a paragraph starting with 'В статье используется синтакис [Markdown Extra](#)'. A section titled 'Заголовок' contains a list of Markdown heading examples: '# Первого уровня', '## Вторго уровня', and '### Третьего уровня'. The browser's mobile interface is visible, including a black status bar at the top with the time '12:57' and a vertical toolbar on the right with icons for home, back, and search.



РАБОТА С КОНСОЛЬЮ

Объект Console



Объект Console служит для доступа к средствам отладки браузера (например, Web Console (Веб-консоль) в Firefox).

<https://developer.mozilla.org/ru/docs/Web/API/Console>

Вывод текста в консоль



Существует четыре категории вывода, которые вы можете создавать, используя функции

- `console.log()`
- `console.info()`
- `console.warn()`
- `console.error()`

Их вывод стилизован по-разному

```
var someObject = { str: "Some text", id: 5 };  
console.log(someObject);  
// [09:27:13.475] ({str:"Some text", id:5})
```

Трассировка стека вызова



```
foo();
```

```
function foo() {  
  function bar() {  
    console.trace();  
  }  
  bar();  
}
```

```
top Filter Default levels ⚙  
> foo();  
  
function foo() {  
  function bar() {  
    console.trace();  
  }  
  bar();  
}  
  
▼ console.trace VM436:5  
bar @ VM436:5  
foo @ VM436:7  
(anonymous) @ VM436:1
```

Выбор объектов



- `$(selector)`

Сокращение для функции `document.querySelector()`

- `$$ (selector)`

Сокращение для `document.querySelectorAll()`.

Возвращает массив элементов, содержащих указанный селектор.

«\$» отношения к jQuery не имеет, но если в документе доступна jQuery, её «\$» перекроет функциональность консоли

Выбранный объект



- \$0

```
▼ <div class="headingWithIndicator">
...   <h3 id="Timers">Timers</h3> == $0
      <span class="indicatorInHeadline minVer
      geckoMinVerMethod">Требуется Gecko 10.0(Firefox 10.0
      / Thunderbird 10.0 / SeaMonkey 2.7)</span>
      ::after
... div #wiki-column-container div #wiki-content #wikiArticle div h3#Timers
⋮ Console What's New Rendering
🔇 top ▼ | Filter Default levels ▼
> $0
< <h3 id="Timers">Timers</h3>
> |
```

Форматтер кода



Developer Tools - http://tyapk.ru/blog/post/m... — □ ×

Elements Console Sources Network >>

prism.css 55f3b7ab11bf9be...8f6-1496906597 ×

Pretty-print this minified file? [more](#) [never show](#) ×

```
1 !function(a,b){"object"==typeof module&&"object"==typeof
2
3 if(window.jQuery===undefined){throw new Error('The jQuery
4 if(window.jQuery.request!==undefined){throw new Error('TI
5 +function($){"use strict";var Request=function(element,h
6 if(!handler.match(/^(?:\w+:\{2\}?on*/))){throw new Error(
7 var $form=options.form?$(options.form):$.closest('form
8 $.trigger('ajaxSetup',[context])
9 var _event=jQuery.Event('oc.beforeRequest')
10 $.triggerEl.trigger(_event,context)
11 if(_event.isDefaultPrevented())return
12 var data=$form.serialize(),loading=options.loading!==u
13 $.each($.parents('[data-request-data]').toArray()).reve
14 if($el.is(':input')&&!$form.length){var inputName=$el.at
15 if(inputName!==undefined&&options.data[inputName]===unde
16 options.data[inputName]=$el.val()}
17 if(options.data!==undefined&&$.isEmptyObject(options.da
18 if($.type(loading)=='string'){loading=$(loading)}
19 var requestHeaders={'X-OCTOBER-REQUEST-HANDLER':handler,
20 if(useFlash){requestHeaders['X-OCTOBER-REQUEST-FLASH']=1
21 var requestOptions={url>window.location.href,crossDomain
22 if(options.evalBeforeUpdate&&eval('(function($el, contex
23 var _event=iQueryv.Event('ajaxBeforeUpdate')
24
```

{ } Line 1, Column 1


Developer Tools - http://tyapk.ru/blog/post/m... — □ ×

Elements Console Sources Network >>

55f3b7ab11bf9be...6597:formatted × >>

```
1 !function(a, b) {
2     "object" == typeof module && "object" == typeof modu
3     if (!a.document)
4         throw new Error("jQuery requires a window wi
5     return b(a)
6 }
7 : b(a)
8 }("undefined" != typeof window ? window : this, function
9     var c = []
10     , d = c.slice
11     , e = c.concat
12     , f = c.push
13     , g = c.indexOf
14     , h = {}
15     , i = h.toString
16     , j = h.hasOwnProperty
17     , k = {}
18     , l = a.document
19     , m = "2.1.3"
20     , n = function(a, b) {
21         return new n.fn.init(a,b)
22     }
23     , o = /^[\\s\\uFEFF\\xA0]+|[\\s\\uFEFF\\xA0]+$|$/g
24     , p = /^-ms-/
25     , q = /-([\da-z-]+)/i
26
```

Line 1, Column 1





Система управления версиями

GIT

GIT



- Система, отслеживающая изменения в файлах.
- С её помощью можно откатиться на более старую версию вашего проекта, сравнивать, анализировать содержимое файлов
- Разрабатывать несколько версий файла,

GIT



- <https://git-scm.com/book/ru/v1>
- <https://githowto.com/ru>
- <https://learngitbranching.js.org/>
- <http://uleming.github.io/gitbook/index.html>
- <https://try.github.io/levels/1/challenges/10>



РЕДАКТОР КОДА

Visual Studio Code



```
app.js - Visual Studio Code
Файл  Правка  Выделение  Вид  Перейти  Отладка  Задачи  Справка

JS app.js x
1  const http = require('http');
2
3  const hostname = '127.0.0.1';
4  const port = 80;
5
6  const server = http.createServer((req, res) => {
7      res.statusCode = 200;
8      res.setHeader('Content-Type', 'text/plain');
9      res.end('Hello World\n');
10 });
11
12 server.listen(port, hostname, () => {
13     console.log(`Server running at http://${hostname}:${port}/`);
14 });
15

Строка 1, столбец 1  Размер интервала табуляции: 4  UTF-8  CRLF  JavaScript
```

Sublime Text



```
E:\home\practice\app.js (october.dev) - Sublime Text (UNREGISTERED)
File Edit Selection Find View Goto Tools Project Preferences Help

< > app.js x

1  const http = require('http');
2
3  const hostname = '127.0.0.1';
4  const port = 80;
5
6  const server = http.createServer((req, res) => {
7      res.statusCode = 200;
8      res.setHeader('Content-Type', 'text/plain'); |
9      res.end('Hello World\n');
10 });
11
12 server.listen(port, hostname, () => {
13     console.log(`Server running at http://${hostname}:${port}/`);
14 });
15

Line 8, Column 50 UTF-8 Windows Tab Size: 4 JavaScript
```

Emmet



Набор плагинов для текстовых редакторов, которые в ускоряют написание кода HTML, XML, XSL, а также кода на некоторых других языках.

Emmet



Такая аббревиатура

```
#page>div.logo+ul#navigation>li*5>a{Item $}
```

Будет трансформирована в

```
<div id="page">
  <div class="logo">
  </div>
  <ul id="navigation">
    <li><a href="">Item 1</a></li>
    <li><a href="">Item 2</a></li>
    <li><a href="">Item 3</a></li>
    <li><a href="">Item 4</a></li>
    <li><a href="">Item 5</a></li>
  </ul>
</div>
```

<https://docs.emmet.io/>



СЕРВИСЫ

Google Page Speed



PageSpeed Tools > Insights

РУКОВОДСТВА

СПРАВОЧНИКИ

ПРИМЕРЫ

ПОДДЕРЖКА

PageSpeed Insights

http://tyapk.ru/

АНАЛИЗИРОВАТЬ



Для мобильных




Для компьютеров

Needs Work

67 / 100

Страница может медленно загружаться, поскольку при ее создании не применены подходящие приемы оптимизации. Ознакомьтесь с приведенными ниже рекомендациями.

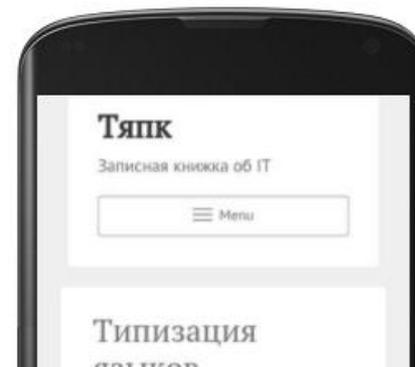

<https://developers.google.com/speed/pagespeed/>

W3C validator



Nu Html Checker

This tool is an ongoing experiment in better HTML checking, and its behavior remains subject to change

Showing results for <http://tyapk.ru/>

Checker Input

Show source outline image report

Check by

Use the Message Filtering button below to hide/show particular messages, and to see total counts of errors and warnings.

1. **Warning** This document appears to be written in Russian. Consider adding `lang="ru"` (or variant) to the `html` start tag.

From line 1, column 16; to line 2, column 6

TYPE html> `<html>` <

<https://validator.w3.org/>

Unicode table



UT Таблица символов Юникода®

Поиск символа 

Например: круг

 **Знак рубля U+20BD**

Russian Ruble Sign

Техническая информация

Номер в Юникоде	U+20BD
HTML-код	&#8381;
Раздел	Символы валют
Наборы	Чаше всего ищут , Знаки валют

<https://unicode-table.com/ru>



РАСШИРЕНИЯ GOOGLE CHROME

Web Developer



chrispederick.com

chrispederick.com

Disable Cookies CSS Forms Images Information Miscellaneous Outline

Disable JavaScript Disable Plugins Reset Disable Features

Disable Notifications Disable Popups

WORK ABOUT BLOG TWITTER

WEB DEVELOPER

A browser extension that adds various web developer tools to a browser.

Firefox Version 11.9 (January 5, 2011)

JSON Formatter (raw)



Raw

Parsed

```
{"breakfast_menu": {"food": [{"name": "Belgian Waffles", "price": "$5.95", "description": "Two of our famous Belgian Waffles with plenty of real maple syrup", "calories": "650"}, {"name": "Strawberry Belgian Waffles", "price": "$7.95", "description": "Light Belgian waffles covered with strawberries and whipped cream", "calories": "900"}, {"name": "Berry-Berry Belgian Waffles", "price": "$8.95", "description": "Light Belgian waffles covered with an assortment of fresh berries and whipped cream", "calories": "900"}, {"name": "French Toast", "price": "$4.50", "description": "Thick slices made from our homemade sourdough bread", "calories": "600"}, {"name": "Homestyle Breakfast", "price": "$6.95", "description": "Two eggs, bacon or sausage, toast, and our ever-popular hash browns", "calories": "950"}]}}
```

JSON Formatter (parsed)



```
{
  "breakfast_menu": {
    "food": [
      {
        "name": "Belgian Waffles",
        "price": "$5.95",
        "description": "Two of our famous Belgian Waffles with plenty of real maple syrup",
        "calories": "650"
      },
      {
        "name": "Strawberry Belgian Waffles",
        "price": "$7.95",
        "description": "Light Belgian waffles covered with strawberries and whipped cream",
        "calories": "900"
      },
      { - }, // 4 items
      { - }, // 4 items
      {
        "name": "Homestyle Breakfast",
        "price": "$6.95",
        "description": "Two eggs, bacon or sausage, toast, and our ever-popular hash browns",
        "calories": "950"
      }
    ]
  }
}
```

Raw

Parsed

XML Viewer (raw)



```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <breakfast_menu>
3   <food>
4     <name>Belgian Waffles</name>
5     <price>$5.95</price>
6     <description>Two of our famous Belgian Waffles with plenty of real maple syrup</description>
7     <calories>650</calories>
8   </food>
9   <food>
10    <name>Strawberry Belgian Waffles</name>
11    <price>$7.95</price>
12    <description>Light Belgian waffles covered with strawberries and whipped cream</description>
13    <calories>900</calories>
14  </food>
15  <food>
16    <name>Berry-Berry Belgian Waffles</name>
17    <price>$8.95</price>
18    <description>Light Belgian waffles covered with an assortment of fresh berries and whipped cream</description>
19    <calories>900</calories>
20  </food>
21  <food>
22    <name>French Toast</name>
23    <price>$4.50</price>
24    <description>Thick slices made from our homemade sourdough bread</description>
25    <calories>600</calories>
26  </food>
27  <food>
28    <name>Homestyle Breakfast</name>
29    <price>$6.95</price>
30    <description>Two eggs, bacon or sausage, toast, and our ever-popular hash browns</description>
31    <calories>950</calories>
32  </food>
33 </breakfast_menu>
34
```

XML Viewer (parsed)



Search by name or XPath

```
<?xml version="1.0" encoding="UTF-8" ?>
<breakfast_menu>
  <food>
    <name> Belgian Waffles </name>
    <price> $5.95 </price>
    <description> Two of our famous Belgian Waffles with plenty of real maple syrup </description>
    <calories> 650 </calories>
  </food>
  <food>
    <name> Strawberry Belgian Waffles </name>
    <price> $7.95 </price>
    <description> Light Belgian waffles covered with strawberries and whipped cream </description>
    <calories> 900 </calories>
  </food>
  <food>
    <name> Berry-Berry Belgian Waffles </name>
    <price> $8.95 </price>
    <description> Light Belgian waffles covered with an assortment of fresh berries and whipped cream </description>
    <calories> 900 </calories>
  </food>
</breakfast_menu>
```

OUTLINE

- breakfast_menu
 - food
 - name
 - price
 - description
 - calories
 - food
 - name
 - price
 - description
 - calories
 - food
 - name
 - price
 - description
 - calories
 - food
 - name
 - price



BONUS

WEBfonting it



A screenshot of a website for 'THE HILL DRESSING' with a font selection overlay. The website header includes the logo 'THE HILL DRESSING' and navigation links for 'Salon History', 'Recruitment', and 'Price List'. A search bar contains the number '1'. Social media icons for Facebook, Instagram, Google+, and Pinterest are visible. The main content area shows a photograph of a hair salon interior with a dark sofa and a white sink. A semi-transparent dark box with a red border is overlaid on the photo, containing the text 'Hair Salon' in a white, bold, sans-serif font. A dark grey font selection dialog is open over the right side of the image. The dialog includes fields for 'Latin', 'Sans serif', and 'Droid Sans #'. It also features controls for 'weights' (400 and italic), 'font size' (48), 'line-height' (1.08), 'color' (FFFFFF), and 'A↔A' (0). At the bottom of the dialog are a close button, a 'Get CSS' button, and the 'Fontstorage.com' logo.

Wappalyzer



CMS

 October CMS

Аналитика

 Google Analytics UA

 Yandex.Metrika

JS фреймворк

 jQuery 2.1.3

Шрифт

 Google Font API

Веб фреймворк

 Laravel

Веб сервер

 Nginx 1.10.3

Язык программирования

php PHP

Операционная система

 Ubuntu

Рекламная сеть

 Google AdSense